

**Boutique Manufacturing  
Conquer the word with Quality**



# FK80-9C

Total Weight: 11000 kg

Standard bucket capacity: 0.3 m<sup>3</sup>

Rated power: 46.3/2200 kW/rpm

- New generation products
- National Three Emissions
- Advanced hydraulic system
- Efficient leveling ability
- Durable metal cover
- Safe and comfortable cab
- Convenient maintenance

## ► Technical specifications

### Basic parameters

Total Weight	11000 kg
Standard bucket capacity	0.3 m <sup>3</sup>

### Performance parameter

Engine	Yanmar
Engine rated power	46.3/2200 kW/rpm
Gradeability	35 °
Maximum digging force of stick	38 kN
Maximum digging force of bucket	56 kN
Driving speed	2.6/3.9 km/h
Main traction force	68 kN
Platform rotation speed	10-13 rpm

### Job parameters



Maximum digging height	7665 mm
Maximum digging depth	3470 mm
Maximum digging radius	6380 mm
Maximum ground excavation radius	6245 mm
Maximum unloading height	5600 mm
Minimum radius of gyration	1840 mm
Maximum vertical digging depth	2960 mm

### Transport size

Overall length (transport state)	7465 mm
Overall width (transport state)	2950 mm
Overall height (transport state)	3215 mm

### Other parameters

Track width	2230 mm
Track length	5700 mm
Minimum ground clearance	1300 mm
Balance weight off the ground	1710 mm
Radius of tail gyration	1840 mm
Fuel tank capacity	151 L
Hydraulic oil tank capacity	125 L

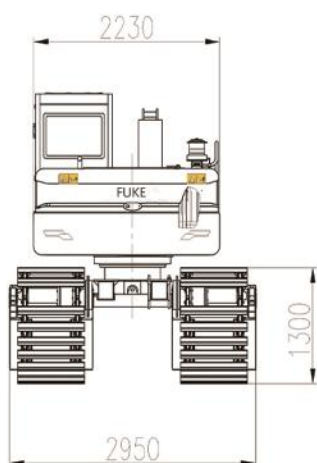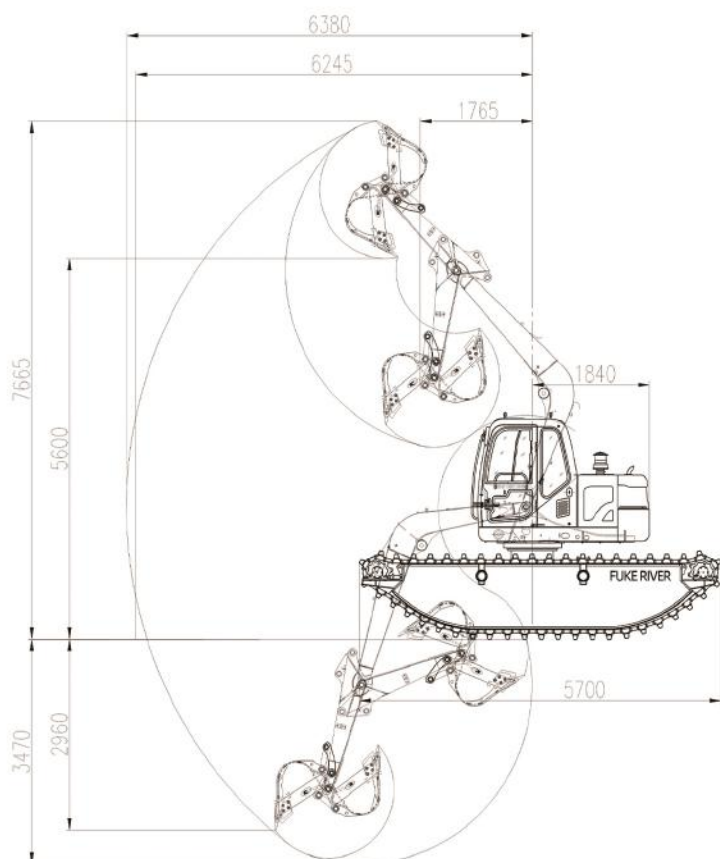

**安徽福客重工设备有限公司**  
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com

www.fukeonline.com

