

FK **FUKE** 福客®

FK60-9

进 取 不 止

FUKE

**Boutique Manufacturing
Conquer The World With Quality**



www.fukeonline.com

fk002@fukebn.com

FK60-9

Total Weight: 5750 kg

Standard bucket capacity: 0.21 m³

Rated power: 30.7/2200 kW/rpm

- New generation products
- National Three Emissions
- Advanced hydraulic system
- Efficient leveling ability
- Durable metal cover
- Safe and comfortable cab
- Convenient maintenance

► Technical specifications

Basic parameters

Total Weight	5750 kg
Standard bucket capacity	0.21 m ³
Standard bucket width	742 mm

Performance parameter

Engine	Kubota
Engine rated power	30.7/2200 kW/rpm
Gradeability	35 °
Maximum digging force of stick	27.5 kN
Maximum digging force of bucket	36.6 kN
Driving speed	2.2/3.6 km/h
Main traction force	46.5 kN
Platform rotation speed	9-11 rpm

Job parameters




Maximum digging height	5740 mm
Maximum digging depth	3720 mm
Maximum digging radius	6065 mm
Maximum ground excavation radius	5945 mm
Maximum unloading height	4040 mm
Minimum radius of gyration	2175 mm
Maximum vertical digging depth	2750 mm

Transport size

Overall length (transport state)	5656 mm
Overall width (transport state)	1920 mm
Overall height (transport state)	2585 mm

Other parameters

Track width	1920 mm
Track length	2494 mm
Track shoe width	400 mm
Minimum ground clearance	316 mm
Balance weight off the ground	670 mm
Radius of tail gyration	1520 mm
Track wheelbase	1960 mm
Fuel tank capacity	103 L
Hydraulic oil tank capacity	74 L

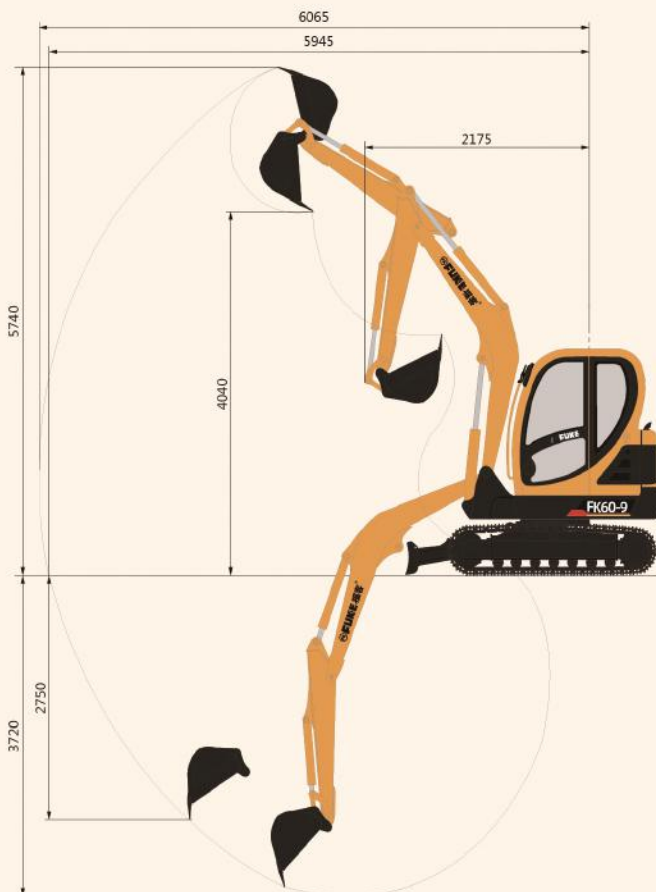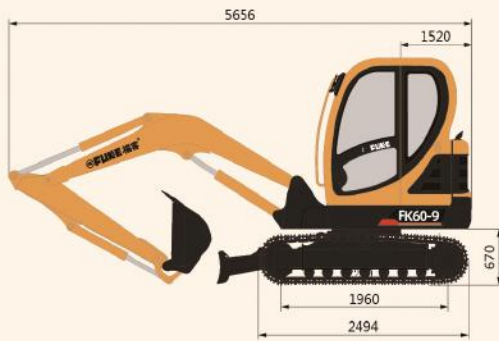

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com

www.fukeonline.com

